



IC-80

2-WHEEL DRIVE

- Capacity on outriggers...17,000 lbs.
- Pick and carry capacity...9,500 lbs.
- Height...7' 3"
- Width...6' 6"
- Sheave height...up to 46'
- Horizontal reach...up to 40'
- Tight turning radius
- 2-Wheel steer standard
- 4-Wheel steer optional
- 4-Wheel drive optional
- Powershift transmission
- Fully hydraulic controls for smooth precise operation
- Independent outrigger controls

BMC[®] BRODERSON[®]
Manufacturing Corp.

P.O. Box 14770, Lenexa, KS 66285-4770
 (913) 888-0606 • FAX (913) 888-8431
 • www.bmccranes.com



CX199F

Optional Four-Wheel Steer




Std. Anti-Two Block



Direct Connected Control Handles



Powershift Transmission

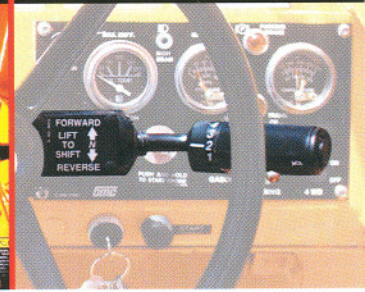

IC-80



4-WHEEL DRIVE 4-WHEEL STEER

- Capacity on outriggers...17,000 lbs.
- Capacity on rubber...9,500 lbs.
- Height...7' 3"
- Width...6' 6"
- Sheave height...up to 46'
- Horizontal reach...up to 40'
- Turning radius...11' 8"
- Powered by Cummins 4B 3.9 Elite Diesel
- 4-Speed synchromesh transmission
- Planetary drive/steer axles
- Individual outrigger controls
- 4-Wheel hydraulic internal wet disc brakes

DMC[®] BRODERSON[®]
Manufacturing Corp.

P.O. Box 14770, Lenexa, KS 66285-4770
(913) 888-0606 • FAX (913) 888-8431
• www.bmccranes.com



CX299F

Standard 4-Wheel Steer



Ease of Operation



Heavy-Duty Tires



4-Wheel Drive / 4-Wheel Steer

